

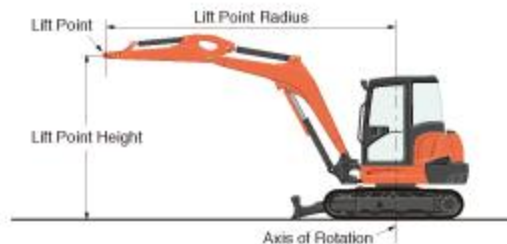
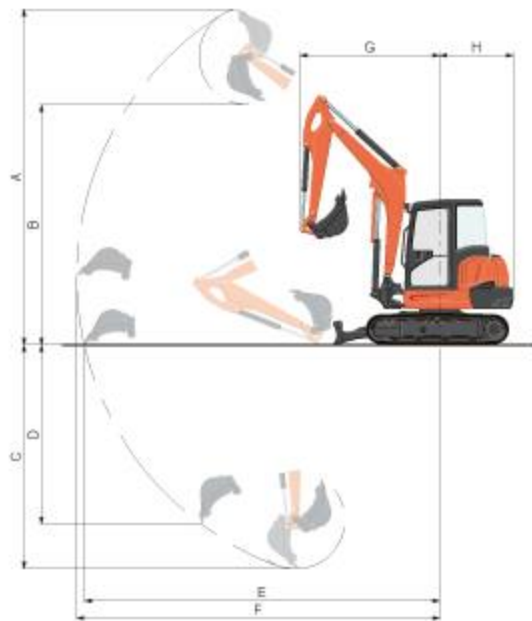
## WORKING RANGE

Model		KX057-4		
A	Max. digging height	ft. in. (mm)	18'10" (5740)	
B	Max. dumping height	ft. in. (mm)	13'8.6" (4180)	
C	Max. digging depth	ft. in. (mm)	12'8.2" (3865)	
D	Max. vertical digging depth	ft. in. (mm)	5'7.3" (1710)	
E	Max. digging radius at ground	ft. in. (mm)	20'0.5" (6110)	
F	Max. digging radius	ft. in. (mm)	20'5.7" (6240)	
G	Min. turning radius	W/O swing	ft. in. (mm)	7'11.3" (2420)
		W swing	ft. in. (mm)	6'9.1" (2060)
H	Min. tail turning radius	in. (mm)	42" (1270)	

## LIFTING CAPACITY

LIFT POINT HEIGHT (ft)	LIFTING CAPACITY OVER-FRONT BLADE DOWN unit=1000 lbs			LIFTING CAPACITY OVER-SIDE unit=1000 lbs			
	LIFT POINT RADIUS (ft)			LIFT POINT RADIUS (ft)			
	12	16	MAX	12	16	MAX	
GL	10	2.33	2.28	1.96	2.30	1.43	1.36
	8	2.63	2.33	1.95	2.24	1.42	1.26
	4	3.41	2.55	2.05	2.09	1.36	1.16
	0	3.89	2.67	2.37	1.96	1.31	1.19


Machine with ROPS canopy and rubber crawler, without bucket.



### Dimensions

The dimensions of the models KX057-4, U48-4 and U55-4 can be found in the following illustrations including tables.
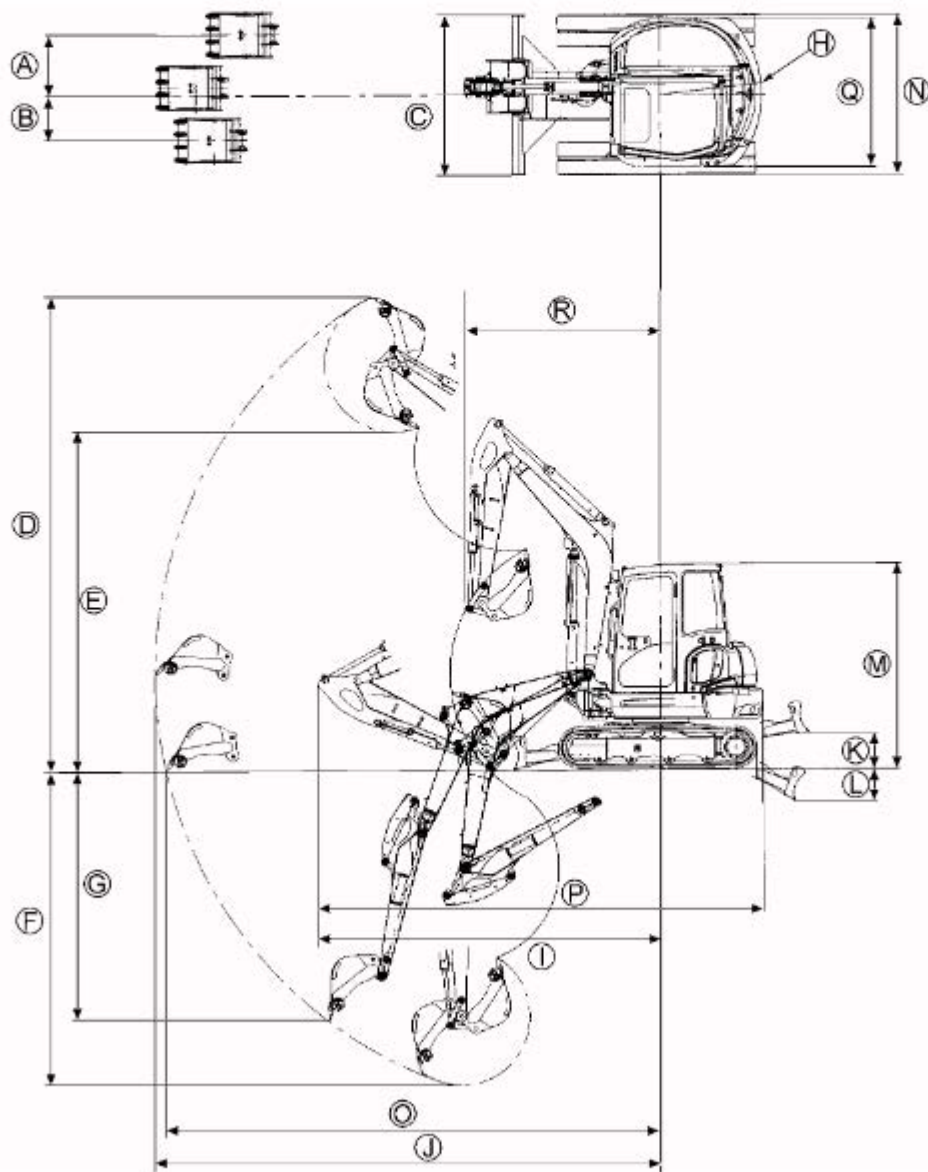
### Dimensions KX057-4, U48-4 and U55-4



## Description of the excavator





All dimensions in mm with original KUBOTA bucket and rubber crawlers

KX057-4	A	B	C	D	E	F	G	H	I	J
1*	750	550	1960	5820	4160	3890	3070	1270	4250	6260
2*	750	550	1960	5665	4005	3630	2830	1270	4235	6025
	K	L	M	N	O	P	Q	R		
1*	440	410	2550	1960	6130	5520	1830	2420		
2*	440	410	2550	1960	5880	5505	1830	2380		

U48-4	A	B	C	D	E	F	G	H	I	J
3*	815	625	1960	5440	3770	3380	2670	990	4135	5850
	K	L	M	N	O	P	Q	R		
3*	440	410	2550	1960	5710	5330	1830	2390		

U55-4	A	B	C	D	E	F	G	H	I	J
4*	815	625	1960	5665	4005	3630	2830	1045	4315	6105
	K	L	M	N	O	P	Q	R		
4*	440	410	2550	1960	5960	5500	1830	2460		

### Arm version

Name		Type	
1*	Arm 1820 mm		A = 1820 mm
2*	Arm 1570 mm		A = 1570 mm
3*	Arm 1450 mm		A = 1450 mm
4*	Arm 1570 mm		A = 1570 mm